


CABLE for CCD CAMERAS

We have developed and supplied the connection cable of industrial CCD cameras over many years. The cable for CCD cameras is a connection cable, which consists of a highly efficient micro round shape connector and a compound multi-pin cable, and has a standard cable, L-shape cable, a robot cable, etc. according to the use. In addition, it corresponds also to special specifications.

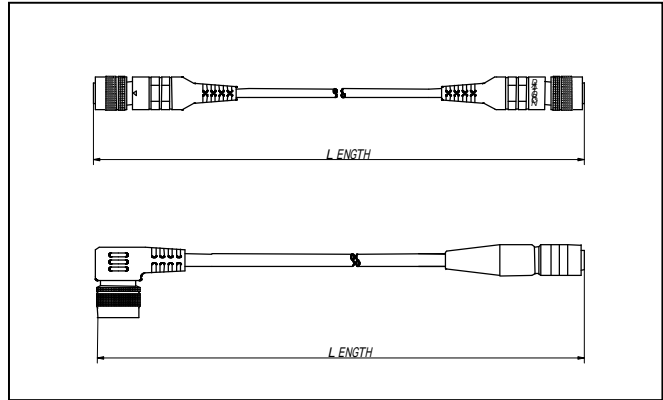

Cable specification list

Model No.	Type of connectors	Cable Specification
DTXC - 12 P * * S	Molded Type	Standard type with shield
DTXC - 12 P * * E	Assembled Type (for small order)	With shield
DTXC - 12 P * * *	Assembled Type	Without shield
DTXC - 12 P * * *	L-shape, Molded Type (Socket side only)	=Direction of socket (U:up, D:down, L:left, R:right), With shield
DTXC - 12 P * * RT	Assembled Type	Robot cable without shield, Super high flexibility
DTXC - 12 P * * RT - S	Assembled Type	Robot cable with shield, High flexibility
DTXC - 12 P * * ET	Assembled and Molded Type	Robot cable with shield, VA products
DTXC - 12 P J * * E	Assembled Type	Relay cable with shield
DTXC - 9 DB * *	D-SUB9pins - BNCX5	R.G.B. SYNC., Video
DTXC - 9 DD * *	D-SUB9pins at both ends	R.G.B. SYNC., Video
DTXC - 12 · 6 P * *	Two forked (12pins, 6pins) at both ends	Only for XC-7500,8500CE
DTXC - 6 P * *	6pins at both ends	Trigger cable

* * =Length(m) ex. "02" = 2m

The contents of specification may be changed without a preliminary announcement.

Selling Company:
Daito Electron Co., Ltd.

<http://www.daitron.co.jp/>



MANUFACTURER:
DAITO DENSO CO., LTD.
TAMA FACTORY
3-29, Nagaoka 2-chome, Mizuho-cho,
Tama-gun, TOKYO, 190-1232, JAPAN
TEL(042)557-5711 FAX(042)556-0082
<http://www.daitodenso.co.jp/>